

Prefabricated plants for the treatment of rainwater and first rainwater


Series SO/AC Mineral oil separators for small units.

System for small surfaces with continuous treatment for rain water.

in compliance with UNI EN 858 branded **CE**

Technical specifications

Supply of a separation tank type EMS WATER TECHNOLOGY series SO/AC, dimensioned according to the prescriptions of the EN 858-1, regulations, class 1, branded CE, prefabricated for the treatment of water coming from waterproofed service areas, made of highly resistant reinforced concrete, complete with an AISI deflector for the incoming sewage, cover slab suitable for car passage and manholes for inspection with cast iron D 400 cover.

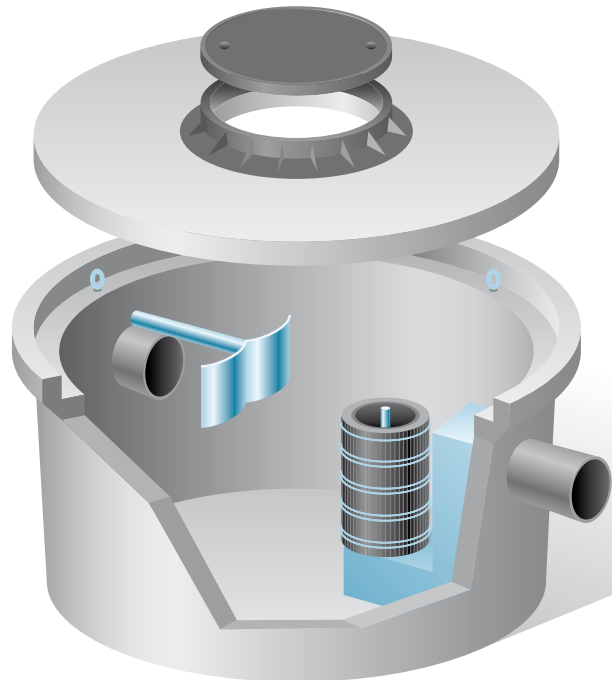

DESCRIPTION	MEASURE UNIT	SO/AC 4	SO/AC 10	SO/AC 20	SO/AC 30	SO/AC 40	SO/AC 50
Nominal flow	l/s	4	10,00	20,00	30,00	40,00	50,00
Max parked cars	N.	8	16	20	28	36	44
Oil separator volume	l	1900	2400	3800	5300	7500	10000
Separator dimensions							
- Diameter	cm	160	220	220	220	250	250
- Height	cm	175	130	180	230	235	285
Inlet / outlet pipes diameter	mm	160	160	200	250	300	300
Total weight	q.li	30	46	56	64	90	110
Heaviest piece weight	q.li	22	30	30	30	60	80

The values stated are just for information. EMS WATER TECHNOLOGY retains the right to change them at any time.